

PUBLISHED: 12-JUN-2013
2011.0 RANGE ROVER (LM), 204-01

FRONT SUSPENSION

FRONT STABILIZER BAR LINK (6513964)

REMOVAL AND INSTALLATION

- **60.10.02**
- **FRONT STABILIZER BAR LINK – EACH – RENEW**
- **ALL DERIVATIVES**
- **0.30**

REMOVAL

1.



WARNING:


Do not work on or under a vehicle supported only by a jack. Always support the vehicle on safety stands.

Raise the front of the vehicle.

2.

Remove the wheel and tire.

3.

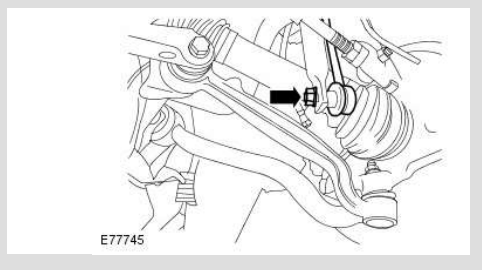

Release the stabilizer bar link.

Remove the nut.

4.




CAUTION:

Note the fitted position of the special washer.



NOTE:

Discard the nuts.

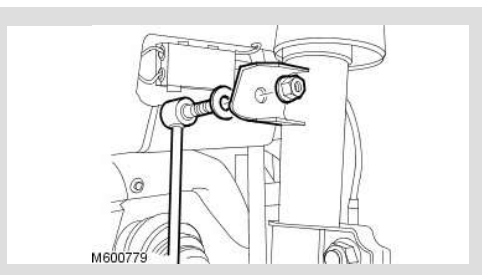

Remove the stabilizer bar link.

Remove the nut.

Collect the washer.

INSTALLATION

1.



NOTE:

Install new nuts.

Install the stabilizer bar link.

Install the special washer.

Tighten the nuts to 100 Nm (74 lb.ft).

2.

Install the wheel and tire.

Tighten the wheel nuts to 140 Nm (103 lb.ft).