



- Tighten to 30 Nm (22 lb.ft).

12. Tighten to 20 Nm (15 lb.ft).

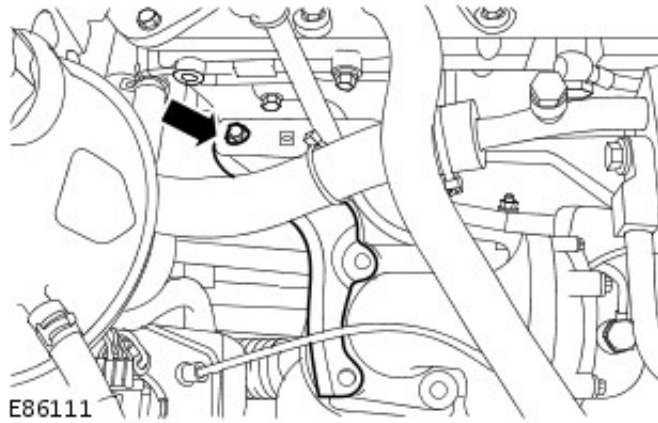


13. Install the turbocharger heat shield.

- Tighten to 10 Nm (7 lb.ft).

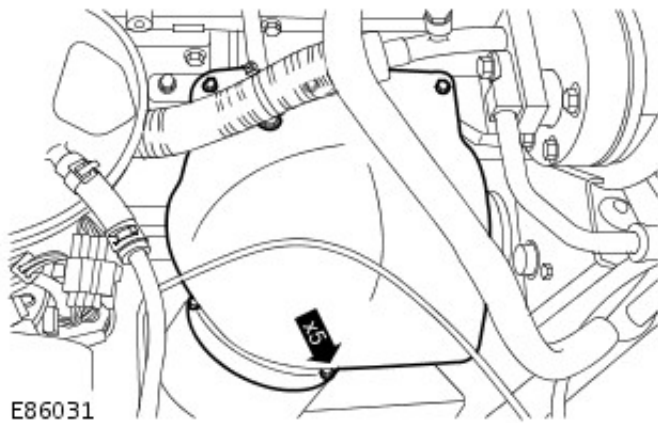

14. Connect the turbocharger electrical connector.

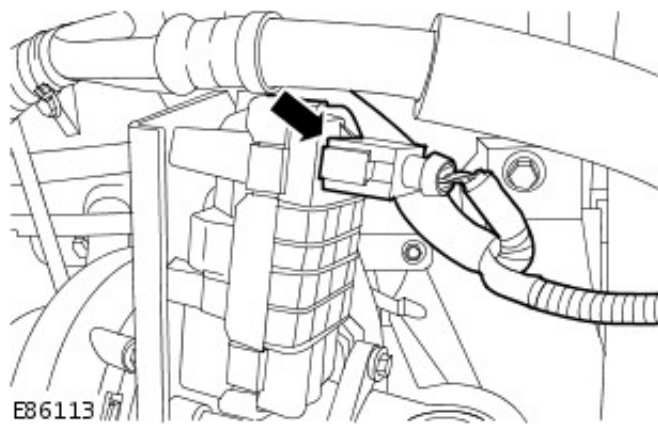

15. Tighten to 3 Nm (2 lb.ft).