


Fuel Tank and Lines - 2.4L Duratorq-TDCi HPCR (103kW/140PS) - Puma - Fuel Tank Filler Pipe

Removal and Installation

Removal

1. Drain fuel tank.
For additional information, refer to: [Fuel Tank Draining](#) (310-00 Fuel System - General Information, General Procedures).
2. Loosen clip securing breather hose to fuel filler neck and release hose.
3. Loosen clip securing fuel filler hose to neck and release hose.
4. Remove screw and release earth lead from filler neck.
5. Remove grommet securing filler neck to body.

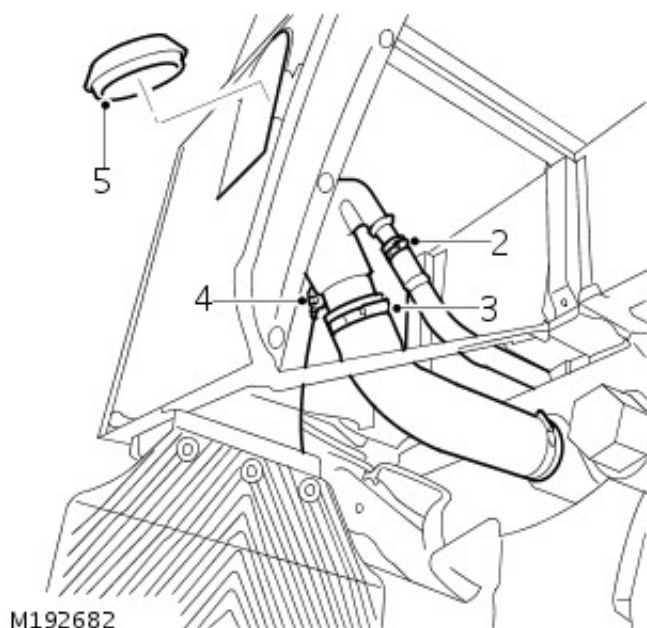

6. Remove filler neck from body.

Installation

1. Fit filler neck to body.
2. Coat rubber grommet with soap solution.
3. Fit rubber grommet securing filler neck to body.
4. Connect earth lead and tighten screw.
5. Connect filler hose to neck and tighten clip.
6. Fit breather hose to filler neck and secure with clip.